

Project Name: York RTU-cfm Distributors-R454B

Unit Model #: PH3E36N00S21

Quantity: 1

System: PH3E36N00S21

Cooling Performance

Total net capacity	36.6 MBH
Sensible net capacity	26.7 MBH
Seasonal Efficiency (at ARI)	13.40 SEER2
Efficiency (at ARI)	12.85 EER2
Ambient DB temp.	95.0 °F
Entering DB temp.	80.0 °F
Entering WB temp.	67.0 °F
Unit Leaving DB temp.	59.4 °F
Unit Leaving WB temp.	57.4 °F
Leaving air temp dew point	56.1 °F
Power input	2.81 kW
Sound power	73 dB(a)

Refrigerant

Refrigerant type	R-454B
Sys1	7 lb 5 oz

Heat Pump Performance

Heating output capacity	35.1 MBH
Supply air	1000 cfm
Ambient DB temp.	47 °F
Entering DB temp.	60 °F
Leaving DB temp.	92.5 °F
Air temp. rise	32.5 °F
Power Input	2.62 kW
Cop	3.93 COP
HSPF2	6.7

Supply Air Blower Performance

Supply air	1200 cfm
Ext. static pressure	0.68 IWG
Blower speed description	#4 MED-HI
Duct location	Bottom
Motor rating	0.50 HP
Elevation	0 ft
Drive type	DIRECT

Electrical Data

Power supply	208-1-60	230-1-60
Unit min circuit ampacity	27.3 A	27.3 A
Unit max over-current protection	40 A	40 A

Dimensions & Weight

Hgt 47 in	Len 52 in	Wth 46 in
Weight with factory installed options		423 lb

Matchup Information

AHRI Reference Number	217662813
AHRI Rated Capacity	MBH
AHRI Rated Efficiency	13.4 SEER2

Note: Please refer to the tech guide for listed maximum static pressures



Note: Electrical MCA/MOCP shown is without heat kit.

For MCA/MOCP with electric heat kits, please see last page of submittal.

Note: Single Phase units do not include a filter frame.

Please add to order if required.

Note: Single Phase units will require a transformer if an economizer is used.



3 Ton

Unit Features

- On Site Flexibility - All model sizes use a compact design cabinet in one of two footprints. This provides installer flexibility for placing the proper tonnage unit on curbs or pads with the smallest footprint.
- (RDS) A2L Sensor Factory Installed
- Convertible Airflow Design - The bottom duct openings are covered when they leave the factory, ready to be used for a side supply/side return application. If a bottom supply/bottom return application is desired, simply remove the two panels from the bottom of the unit and place them in the side supply/side return duct openings.
- Durable Finish - The cabinet is made of G90 galvanized steel with a powder paint coating for appearance and protection. Provides superior corrosion resistance (1000 hour salt spray tested).
- Lower Installation Cost - Installation time and costs are reduced by easy power and control wiring connections. Smaller base dimensions means less space is required on the ground or roof. All units are completely wired, charged with R454B and tested prior to shipment.
- Electric Heat - All electric heat models use field installed 6HK electric heat kits, which are available in 230v/1/60, 230v/3/60 and 460v/3/60 versions.
- Full Perimeter Base Rails - The easily removable base rails provide a solid foundation for the entire unit and protects the unit during shipment.
- Low Operating Sound Level - The upward air flow carries the normal operating noise up and away from the living area. The rigid top panel effectively isolates any motor sound. Isolator mounted compressor and the rippled fins of the condenser coil muffle the normal fan motor and compressor operating sounds
- Easy Service Access - Individual access panels covering the electrical controls makes servicing easy.
- Condenser Coil Grille - All models utilize a stamped slotted design which provides superior impact protection against small objects during transit and after installation.
- Coil Design - Heat Pumps use grooved copper tubes and enhanced aluminum fin construction. Evaporator coils use aluminum tubing with aluminum fins for effective heat transfer.

Warranty

- 10 Year Limited Compressor, Coils, Parts Warranty (with Registration to original homeowner)
- 5 Year Limited Compressor, Coils, Parts Warranty (non-registered)
- 10 Year Limited Warranty on Electric Heater Elements



Project Name: York RTU-cfm Distributors-R454B

Unit Model #: PH3E36N00S21

Quantity: 1

System: PH3E36N00S21

Factory Installed Options

PH3E36N00S21

Equipment Options		Option(s) Selected
Model Family :	PH	Packaged Heat Pump
Nominal SEER :	3	13.4 SEER2
Refrigerant :	E	R454B Refrigerant
Nominal Cooling Capacity :	36	3 Ton
Heat Type :	N	Electric Heat Field Installed
Heat Capacity :	00	
Controls :	S	Standard (Conventional) Controls
Voltage :	2	208/230-1-60
Generation :	1	


Project Name: York RTU-cfm
Distributors-R454B

Unit Model #: PH3E36N00S21

Quantity: 1

PH3 Component Locations

Figure 1: Unit components

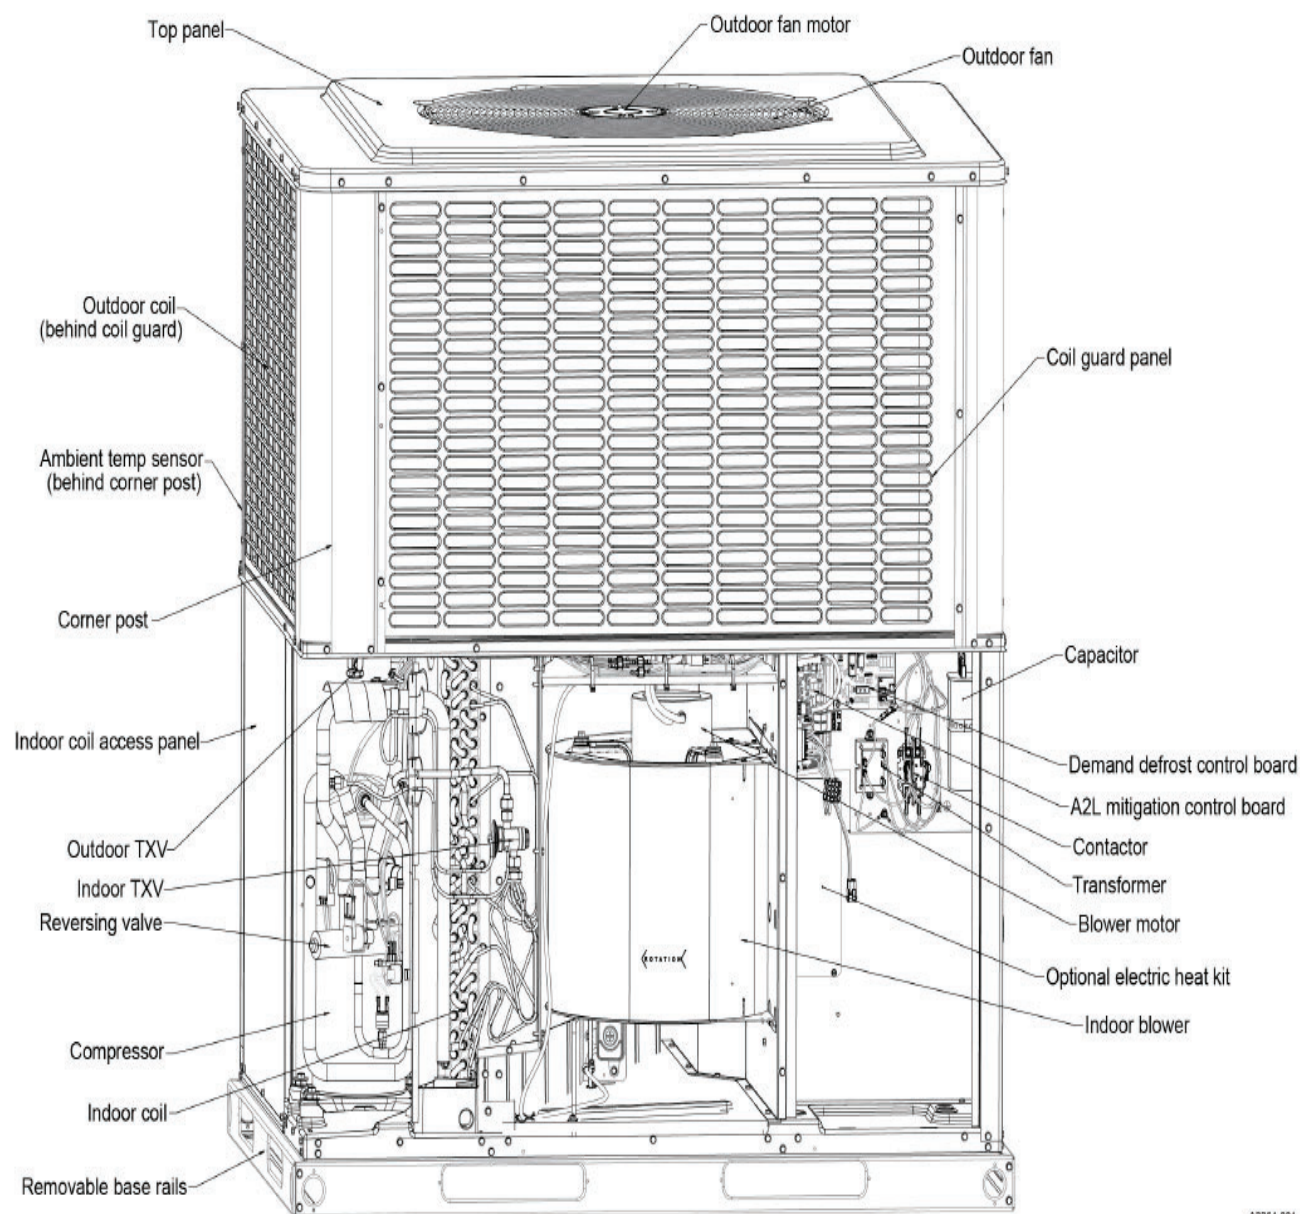

A2264-001

Project Name: York RTU-cfm
Distributors-R454B


Unit Model #: PH3E36N00S21

Quantity: 1

PH3 COG Weights and Clearances

Weights and dimensions

Figure 3: Center of gravity

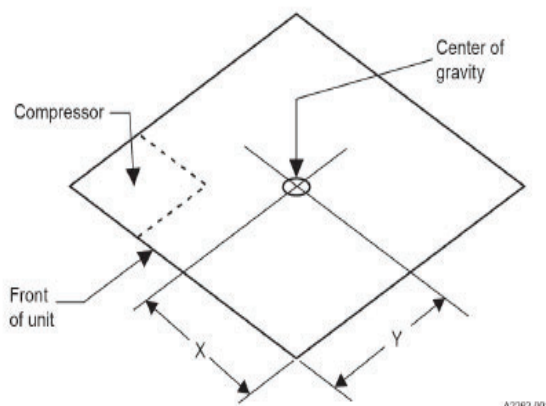

A2262-001

Table 17: Weights and dimensions

Model	Weight (lb)		Center of gravity (in.)	
	Shipping	Operating	X	Y
PH3E24N00S21	345	340	29	15
PH3E36N00S21	428	423	29	18
PH3E48N00S21	487	482	30	18
PH3E60N00S21	504	499	29	18

Unit clearances

Table 18: Unit clearances

Direction	Distance (in.)	Direction	Distance (in.)
Top	36	Right side	36
Side opposite ducts	36	Left side	24
Duct panel	6	Bottom	1

Note:

- For 20 kW and 25 kW electric heat kits, provide a minimum clearance of 1 in. on all sides of the supply air duct for the first 3 ft of the supply air duct. 0 in. clearance is acceptable on all sides of the supply air duct for the remaining length of the supply air duct. For all other electric heat kits, 0 in. clearance is acceptable on all sides of the supply air duct for the entire length of the supply air duct.
- Install units outdoors. Make sure that overhanging structures or shrubs do not obstruct the outdoor air discharge outlet.
- You can install units on combustible materials made from wood or class A, B, or C roof covering materials if the factory base rails are left in place as shipped.
- For units installed on a roof curb, you can reduce the minimum clearance between combustible roof curb material and the supply air duct from 1 in. to 1/2 in.


Project Name: York RTU-cfm
Distributors-R454B

Unit Model #: PH3E36N00S21

Quantity: 1

PH3 Dimensions

Figure 2: Unit dimensions and access locations

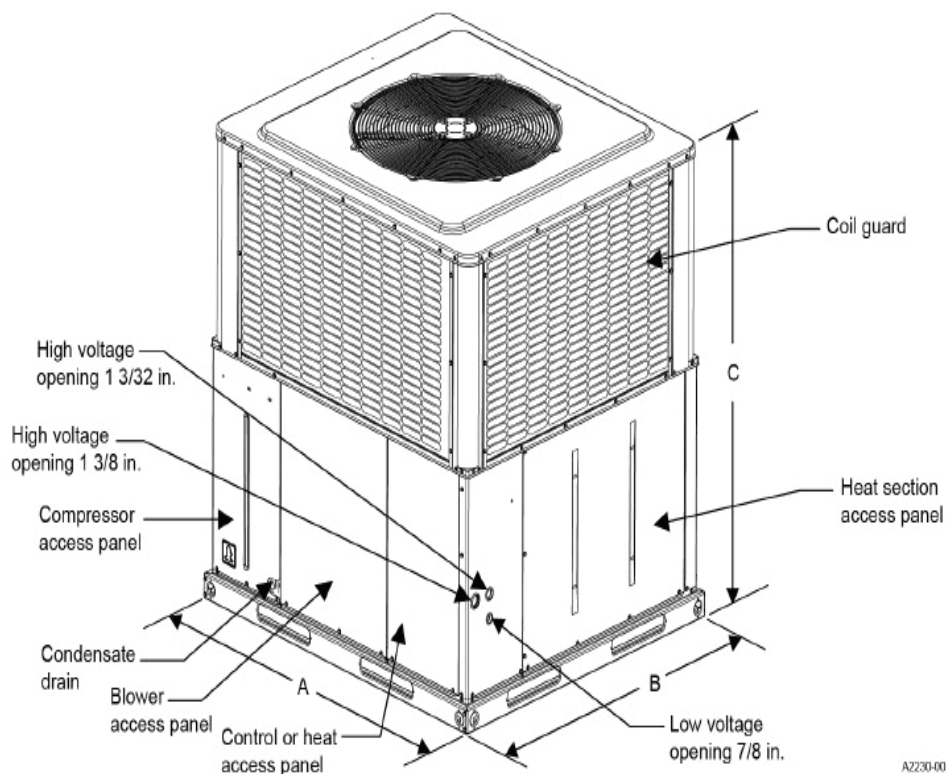

A2230-001

Table 16: Unit dimensions

Model	Dimensions (in.)		
	A	B	C
PH3E24N00S2	51 1/4	35 3/4	44
PH3E36N00S2	51 1/4	45 3/4	47
PH3E48N00S2	51 1/4	45 3/4	50
PH3E60N00S2	51 1/4	45 3/4	55

Project Name: York RTU-cfm
Distributors-R454B

Unit Model #: PH3E36N00S21

Quantity: 1

PH3 Side Duct Dimensions

Figure 6: Rear duct dimensions (in.)

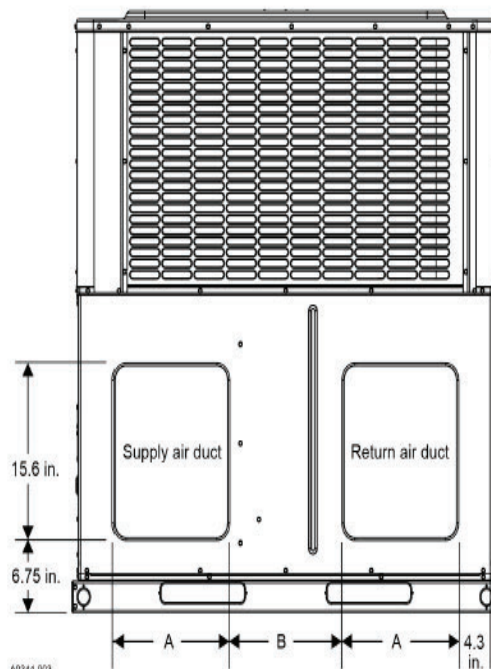


Table 29: Rear duct dimensions

Model	A (in.)	B (in.)
PH3E24N00S2	9.6	22
PH3E36N00S2, PH3E48N00S2, and PH3E60N00S2	13.6	14

① **Note:** See Figure 2 for side hole sizes of electrical lines.

Project Name: York RTU-cfm
Distributors-R454B

Unit Model #: PH3E36N00S21

Quantity: 1

PH3 Bottom Duct Dimensions

Figure 5: Bottom duct dimensions (in.)

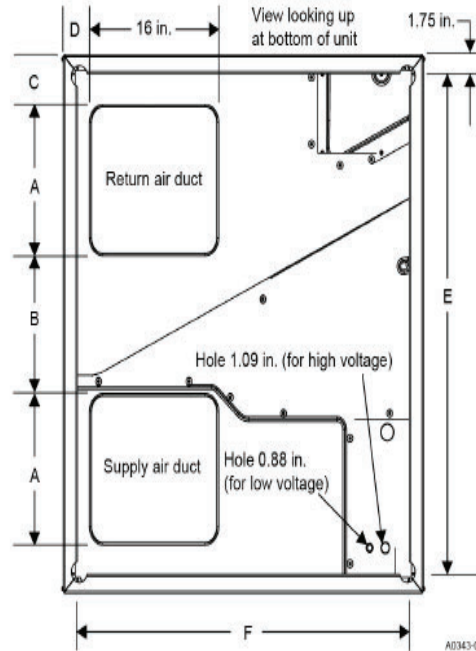


Table 28: Bottom duct dimensions

Model	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)
PH3E24N00S2	10	21.5	5	4.5	47.5	32
PH3E36N00S2, PH3E48N00S2, and PH3E60N00S2	14	13.5	5	3.5	47.5	42

Electrical data for 208/230-1-60 single source power

Table 19: Electrical data for 208/230-1-60 single source power

Model	Compressor			Outdoor fan motor	Blower motor	Electric heat option						MCA (A)		MOP (A)			
	RLA	LRA	MCC			FLA	FLA	Electric heat kit model	Electric heat kit (kW)		Stages	Electric heat kit (A)		208 V	230 V	208 V	230 V
									208 V	230 V		208 V	230 V				
PH3E36	16.6	93.5	26.0	1.7	4.8	none	—	—	—	—	—	27.3	27.3	40	40		
						6HK16500506	3.6	4.4	1	17.3	19.2	49.0	51.3	60	60		
						6HK16500806	5.8	7.1	1	27.7	30.7	62.0	65.6	70	70		
						6HK16501006	7.2	8.8	1	34.7	38.3	70.6	75.2	80	80		
						6HK16501506	10.8	13.2	2	52.0	57.5	92.3	99.2	100	100		

Single Point wiring kit required with single source power

Table 23: Single-point wiring kit

Model	Electric heat kit (kW)	Breaker size (A)	Single-point wiring kit part number
PH3E36N00S2	Up to 15	40	S1-2SPWK007

For Multi-Source Power, confirm if site voltage is 208/1 or 230/1 and use correct data below:

Electrical data for 208-1-60 multi source power

Table 20: Electrical data for 208-1-60 multi source power

Model	Compressor			Outdoor fan motor	Blower motor	Electric heat option (208 V)					Multi source (208 V)								
	RLA	LRA	MCC			FLA	FLA	Electric heat kit model	Electric heat kit (kW)	Stages	Electric heat kit (A)	Circuit 1 (compressor)		Circuit 2 (heat)		Circuit 3 (heat)		Circuit 4 (heat)	
												MCA (A)	MOP (A)	MCA (A)	MOP (A)	MCA (A)	MOP (A)	MCA (A)	MOP (A)
PH3E36	16.6	93.5	26.0	1.7	4.8	none	—	—	—	27.3	40	—	—	—	—	—	—		
						6HK(0,1)6500506	3.6	1	17.3	27.3	40	21.7	25	—	—	—	—		
						6HK(0,1)6500806	5.8	1	27.7	27.3	40	34.7	35	—	—	—	—		
						6HK(0,1)6501006	7.2	1	34.7	27.3	40	43.3	45	—	—	—	—		
						6HK16501506	10.8	2	52.0	27.3	40	21.7	25	43.3	45	—	—		
						6HK26501506	10.8	2	52.0	27.3	40	65.0	70	—	—	—	—		

Electrical data for 230-1-60 multi source power

Table 21: Electrical data for 230-1-60 multi source power

Model	Compressor			Outdoor fan motor	Blower motor	Electric heat option (230 V)				Multi source (230 V)							
						Electric heat kit model	Electric heat kit (kW)	Stages	Electric heat kit (A)	Circuit 1 (compressor)		Circuit 2 (heat)		Circuit 3 (heat)		Circuit 4 (heat)	
	RLA	LRA	MCC							FLA	FLA	MCA (A)	MOP (A)	MCA (A)	MOP (A)	MCA (A)	MOP (A)
PH3E36	16.6	93.5	26.0	1.7	4.8	none	—	—	—	27.3	40	—	—	—	—	—	—
						6HK(0,1)6500506	4.4	1	19.2	27.3	40	24.0	25	—	—	—	—
						6HK(0,1)6500806	7.1	1	30.7	27.3	40	38.3	40	—	—	—	—
						6HK(0,1)6501006	8.8	1	38.3	27.3	40	47.9	50	—	—	—	—
						6HK16501506	13.2	2	57.5	27.3	40	24.0	25	47.9	50	—	—
						6HK26501506	13.2	2	57.5	27.3	40	71.9	80	—	—	—	—