

Project Name: **454B Stock**

Unit Model #: **KQG04D4A1AA1A111A1**

Quantity: **1**

System: **KQG04D4A1AA1A111A1**

Cooling Performance

Total gross capacity	37.0 MBH
Sensible gross capacity	27.3 MBH
Seasonal Efficiency (at ARI)	14.00 SEER2
Efficiency (at ARI)	EER
Efficiency (at ARI)	12.00 EER2
Ambient DB temp.	95.0 °F
Entering DB temp.	80.0 °F
Entering WB temp.	67.0 °F
Evap Coil Leaving DB temp.	58.9 °F
Evap Coil Leaving WB temp.	57.3 °F
Unit Leaving DB temp.	60.2 °F
Unit Leaving WB temp.	57.7 °F
Leaving air temp dew point	56.30 °F
Power input (w/o blower)	2.50 kW
Sound power	79 dB(a)

Refrigerant

Refrigerant type	R-454B
Sys1	3 lb 6 oz

Gas Heating Performance

Entering DB temp.	60 °F
Heating output capacity (Max)	56.0 MBH
Supply air	1200 cfm
Heating input capacity (Max)	70 MBH
Leaving DB temp.	103.2 °F
Air temp. rise	43.2 °F
SSE	80.0 %
Stages	1

Supply Air Blower Performance

Supply air	1200 cfm
Ext. static pressure	0.88 IWG
Blower speed	1156 rpm
Blower speed description	Hi
Duct location	Bottom
Motor rating	0.75 HP
Actual required BHP	0.75 HP
Power input	0.46 kW
Elevation	0 ft
Drive type	DIRECT

Electrical Data

Power supply	460-3-60
Unit min circuit ampacity	11.3 A
Unit min over-current protection	15 A
Unit max over-current protection	15 A

Dimensions & Weight

Hgt 33 in	Len 74 in	Wth 49 in
Weight with factory installed options	508 lb	

Clearances

Right	18 in	Front	36 in	Rear	18 in
Top	72 in	Bottom	1 in	Left	12 in

Note: Please refer to the tech guide for listed maximum static pressures



3 Ton

- All units are manufactured at an ISO 9001 registered facility and each rooftop is completely computer-run tested prior to shipment.

Unit Features

- Single Stage Cooling
- 70 MBH Single Stage Input Low Heat Aluminized Gas
- Unit Cabinet Constructed of Powder Painted Steel, Certified At 750 Hours Salt Spray Test (ASTM B-117 Standards)
- Either supply and/or return can be field converted from vertical to horizontal configuration without cutting panels.
- Full perimeter base rails with built in rigging capabilities
- Scroll Compressors
- Standard Static Direct Drive Blower
- Solid Core Liquid Line Filter Driers
- Unit Ships with 2" Throwaway Filters
- Replacement Filters: 2 - (16" x 25"). Unit accepts 2" or 4" wide filters.
- Single Point Power Connection
- Short Circuit Current: 5kA RMS Symmetrical
- Microchannel All Aluminum Condenser Coil, Copper tube/Aluminum fin Evaporator Coil

Standard Unit Controller

- Smart Equipment Control Board
- On-Board Diagnostic and Fault Code display
- An Integrated Low-Ambient Control, Anti-Short Cycle Protection, Lead-Lag, Fan On and Fan off Delays, Low Voltage Protection, Allows all units to operate in the cooling mode down to 0 °F outdoor ambient without additional components or intervention.
- Safety Monitoring - Monitors the high and low-pressure switches, the freezestats, the gas valve, if applicable, and the temperature limit switch on gas and electric heat units. The unit control board will alarm on ignition failures, safety lockouts and repeated limit switch trips.

BAS Controller

- Smart Equipment Controller including Discharge Air, Return Air, and Outdoor Air Temperature Sensors.

Warranty

- One (1) Year Limited Warranty on the Complete Unit
- Five (5) Year Warranty - Compressors
- Ten (10) Year Warranty - Aluminized Steel Tubular Heat Exchangers

Project Name: **454B Stock**Unit Model #: **KQG04D4A1AA1A111A1**Quantity: **1**System: **KQG04D4A1AA1A111A1****Additional Electrical Data**

Power supply	460-3-60
Unit min circuit ampacity	11.3 A
Unit max over-current protection	15 A
Min Voltage	432 V
Max Voltage	504 V
Comp #1 RLA	5.8
Comp #1 LRA	44.3
Indoor Mtr Voltage	460-1-60
Indoor Mtr FLA	3.2
Outdoor Mtr Qty	1
Outdoor Fan Voltage	460-1-60
OD Fan Mtr FLA (ea.)	0.8
Power Ex Mtr Qty (if applicable)	1
Powered Ex Voltage(if applicable)	460-3-60
Power Ex Mtr FLA (ea) (if applicable)	0.5
Combustion Mtr Qty	1
Combustion Motor Voltage	208/230-1-60
Combustion Mtr FLA (ea)	0.5



Project Name: 454B Stock

Unit Model #: KQG04D4A1AA1A111A1

Quantity: 1

System: KQG04D4A1AA1A111A1

Factory Installed Options

KQG04D4A1AA1A111A1

Equipment Options		Option(s) Selected
Product Category:	KQ	York Sun Core Single Packaged R-454B Air Conditioner
Heat Type:	G	Gas Heat
Nominal Cooling Capacity:	04	3 Ton Single Stage Cooling 14.0 SEER2 / 12.0 EER2
Heat Size:	D	70 MBH Single Stage Input Low Heat Aluminized Gas
Voltage:	4	460-3-60
Airflow:	A	Standard Static Direct Drive Blower
Airflow Options:	1	
Controls:	A	Smart Equipment Controller including Discharge Air, Return Air, and Outdoor Air Temperature Sensors.
Sensor Options:	1	
Economizer / Damper:	A	
Convenience Outlet:	1	
Electrical Options:	1	
Cabinet Options:	1	
Special Options:	A	
Product Generation:	1	

Unit Model #: KQG04D4A1AA1A111A1

Quantity: 1

ZQ 04-05 Unit Dimensions

ZQ04-05

REV	DATE	REVISION RECORD										THIRD ANGLE PROJECTION		ALL INFORMATION PERTAINING TO THE SUBJECT MATTER HEREON ARE RESERVED AND NO REPRODUCTION IS AUTHORIZED TO REPRODUCE THIS PRINT IN WHOLE OR IN PART OR DISCLOSE ANY OF THE INFORMATION HEREIN TO ANY OTHER WITHOUT WRITTEN RELEASE BY JOHNSON CONTROLS		SAFETY AND KEY CHARACTERISTICS PER BE-300-STD-B1							
EC	NO	DR	CK	ENG	21375	REG	JC	DW	37128	REG	TPS	AJR	44829	HG	RG	AJR	DATE	TYPE	NOT APPLICABLE	REV	DATE	TYPE	NOT APPLICABLE
					NEW DRAWING																		
					B 05-13-13: NEW DRAWING																		
					C 12-03-14: REMOVE CLEARANCES (NOTE 3). REMOVE EXTRA DIMS FROM VIEW A																		
					D 05-09-16 ADDED ADDITIONAL RIMS TO TABLE FOR 20 UNITS 3 & 4 TON																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-24-16 CORRECTED 4 POINT CORNER LOAD TABLE. CORRECTED CORNER CALL OUTS ON PRINT																		
					D 10-																		

1. FOR OUTDOOR USE ONLY.
2. WEIGHTS SHOWN ARE FOR COOLING ONLY UNITS.
3. RECOMMENDED MIN. CLEARANCES:
RIGHT SIDE: 18 (450) W/SIDE CONDENSATE DRAIN; 24 (600)
LEFT SIDE: 12 (300) W/PIGTAIL; 18 (450)
FRONT: 36 (900)
REAR: 18 (450) W/ECOMIZER/POWER EXHAUST; 36 (900)
TOP: 72 (1800)
BOTTOM: 1 (25)
4. REMOVED.
5. FOR SMALLER SERVICE AND OPERATIONAL CLEARANCES
CONTACT YOUR APPLICATION ENGINEERING DEPARTMENT
6. DOWNFLOW DUCTS DESIGNED TO BE ATTACHED TO ACCESSORY
ROOF CURB ONLY - IF UNIT IS MOUNTED SIDE SUPPLY, IT
IS RECOMMENDED THAT THE DUCTS ARE SUPPORTED BY
CROSS BRACES, AS DONE ON ACCESSORY ROOF CURBS.
7. REMOVED.
8. MINIMUM CONDENSATION TRAP HEIGHT SHALL BE 1.5 TIMES
THE LOWEST NEGATIVE STATIC.
9. DIMENSIONS IN () ARE IN MILLIMETERS OR KILOGRAMS.
10. OPTIONAL COIL GUARDS, GAS HEAT, DISCONNECT SWITCH
SHOWN.
11. TOP PANEL EMBOSMENTS NOT SHOWN FOR DIMENSION CLARITY.
12. HEAT EXCHANGER IS TYPICAL OF HIGH GAS HEAT OPTION.

Information is subject to change without notice. Check local codes.

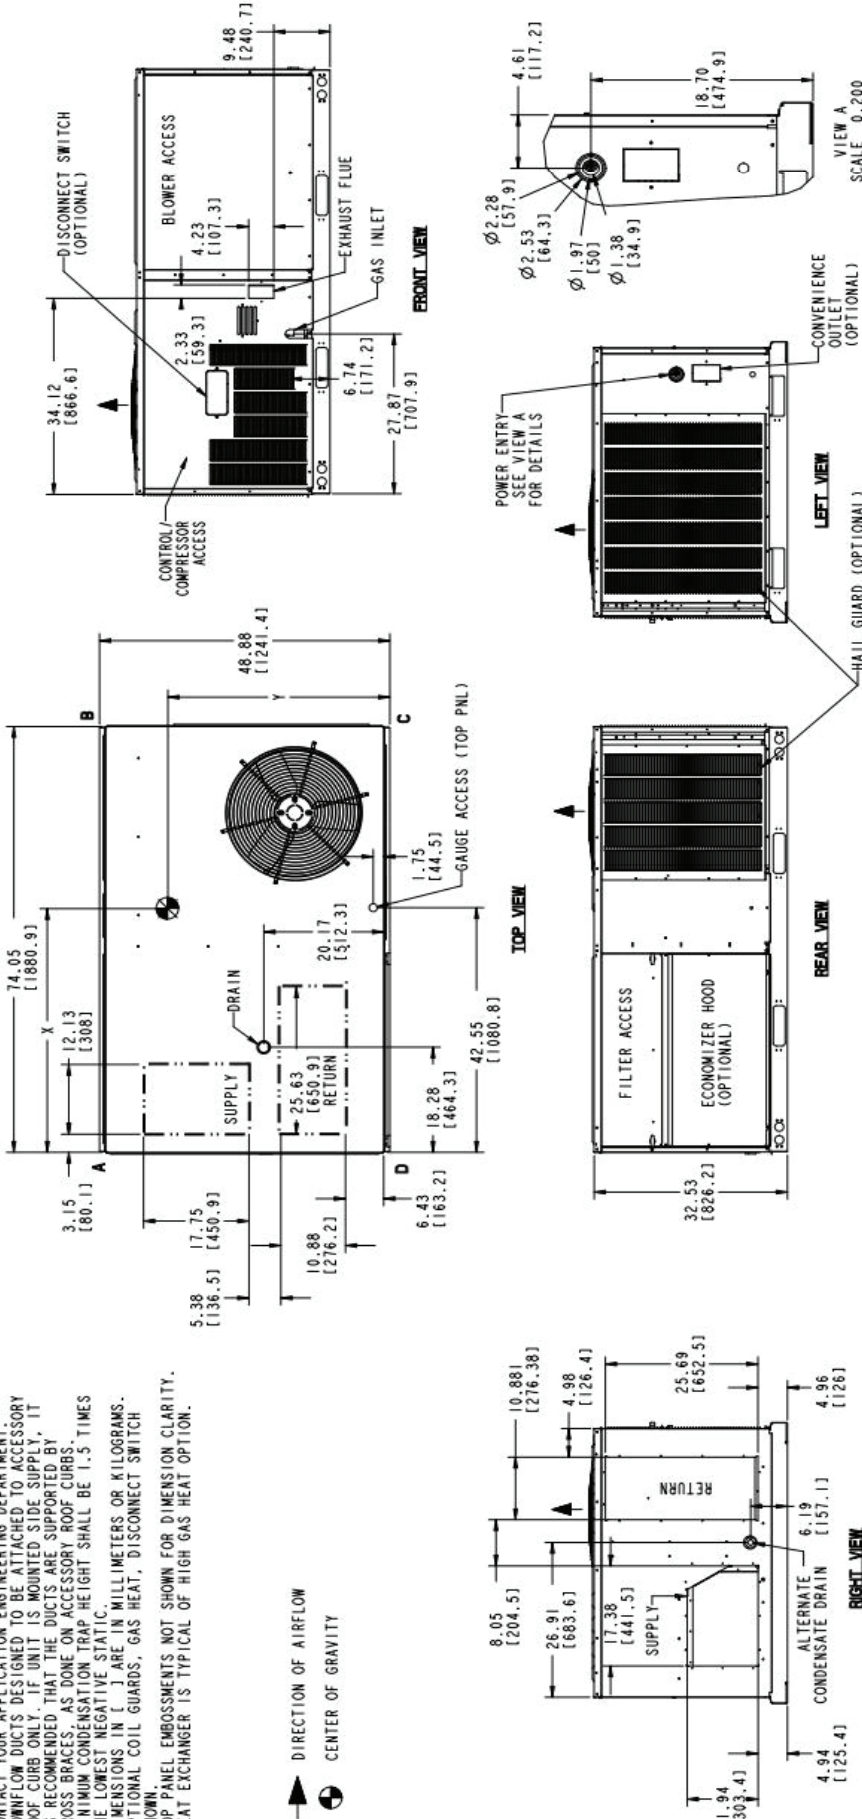
Printed 12/27/2024

Unit Model #: KQG04D4A1AA1A111A1

Submittal

NOTES:

1. FOR OUTDOOR USE ONLY.
2. WEIGHTS SHOWN ARE FOR COOLING ONLY UNITS.
3. RECOMMENDED MIN. CLEARANCES:
RIGHT SIDE: 18 [450] W/SIDE CONDENSATE DRAIN: 24 [600]
LEFT SIDE: 12 [300] W/FITAIL: 18 [450]
FRONT: 36 [900]
REAR: 18 [450] W/ECONOMIZER/POWER EXHAUST: 36 [900]
TOP: 72 [1800]
BOTTOM: 1 [25]
4. FOR SMALLER SERVICE AND OPERATIONAL CLEARANCES
CONTACT YOUR APPLICATION ENGINEERING DEPARTMENT.
5. DOWNFLOW DUCTS DESIGNED TO BE ATTACHED TO ACCESSORY
ROOF CURB ONLY. IF UNIT IS MOUNTED SIDE SUPPLY, IT
IS RECOMMENDED THAT THE DUCTS ARE SUPPORTED BY
CROSS BRACES, AS DONE ON ACCESSORY ROOF CURBS.
6. MINIMUM CONDENSATION TRAP HEIGHT SHALL BE 1.5 TIMES
THE LOWEST NEGATIVE STATIC.
7. DIMENSIONS IN [] ARE IN MILLIMETERS OR KILOGRAMS.
8. OPTIONAL COIL GUARDS, GAS HEAT, DISCONNECT SWITCH
SHOWN.
9. TOP PANEL EMBOSSMENTS NOT SHOWN FOR DIMENSION CLARITY.
10. HEAT EXCHANGER IS TYPICAL OF HIGH GAS HEAT OPERATION.

[illegible]